


Analog electromechanical time switch APC-D1, APC-DR1

Advantages


- The APC time switch controls any electrical installation by means of daily programs.
- Without (D1) or with (DR1) battery backup.
- Manual switch with permanent ON position.
- Supply voltage : AC 230V
- Sealable cover of frontal panel
- Output contact : 1x NO 16A
- Simple dial time setting. Minimum switching time is 15 min.
- 1 module, DIN rail mounting.

Technical data		
	APC-DR1	APC-D1
Supply voltage	230V AC	230V AC
Power reserve	yes (100 hrs)	no
Dial/minimum switching time	15 min	15 min
Operating accuracy	+/- 1s/day at 22°C	+/- 1s/day at 22°C
Program	Daily	Daily
Output contact	1 x NO	1 x NO
Switching capability	16A 125/250V AC1	16A 125/250V AC1
Power consumption	0,5W	0,5W
Operating temperature	-25...+55°C	-10...+45°C
Mounting	DIN rail EN 60715	DIN rail EN 60715
Protection category	IP20	IP20
Overvoltage category	II.	II.
Dimensions	90 x 17,5 x 66	90 x 17,5 x 66
Standards	EN 60730-2-7	EN 60730-2-7

Dimensions

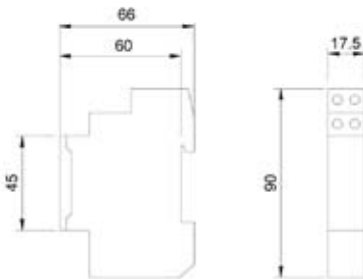

Connection



Programming

